Acasta Ceramics



GENTLE SHEEN, TIMELESS BEAUTY

VelvoSoft Tile Finish is a specific type of finish applied to tiles that provides a smooth, soft sheen that balances between glossy and matte. Often chosen for its subtle sophistication, it ofers a sleek appearance that enhances the texture and color of the tile without overwhelming the space with shine. Whether used in modern or traditional designs, this finish provides a versatile and stylish option that complements a wide range of décor styles.

www.acastaceramics.com



SOFT SHEEN, BOLD STYLE



	SOFT TUOCH
GLOSS VALUE	15 to 17
MOH'S HARDNES	4
ANTI -SKID VALUES	R-9

VelvoSoft Tile Finish is the epitome of refined elegance, offering a smooth, soft sheen that perfectly balances between glossy and matte. This exquisite finish adds a touch of subtle sophistication to any space, enhancing the texture and color of the tiles without overwhelming the overall design with excessive shine. Its sleek appearance makes it an ideal choice for both modern and traditional interiors, providing a versatile and stylish option that complements a wide range of décor styles. Whether you're aiming for a minimalist look or a more ornate setting, VelvoSoft Tile Finish delivers a timeless charm that elevates the aesthetic appeal of any room.





ELEGANT
TILES IN TWO
VERSATILE
SIZES



600X1200MM 9mm Thickness



www.acastaceramics.com

ELEGANCE WITH A TOUGH EDGE

The VelvoSoft Tile Finish blends timeless elegance with exceptional resilience. These tiles not only showcase a sophisticated sheen but also excel in functionality, absorbing odors and standing up to temperature swings, UV exposure, and freezing conditions. They are also resistant to chemicals, fire, and scratches, making them as practical as they are stylish. Perfect for both residential and commercial spaces, they deliver a seamless fusion of form and function.









KITCHENS

INTERIOR

BATHROOM

GYN



RESIDENTIAL








COMMERCIAL

HOSPITALS

URBAN CENTERS

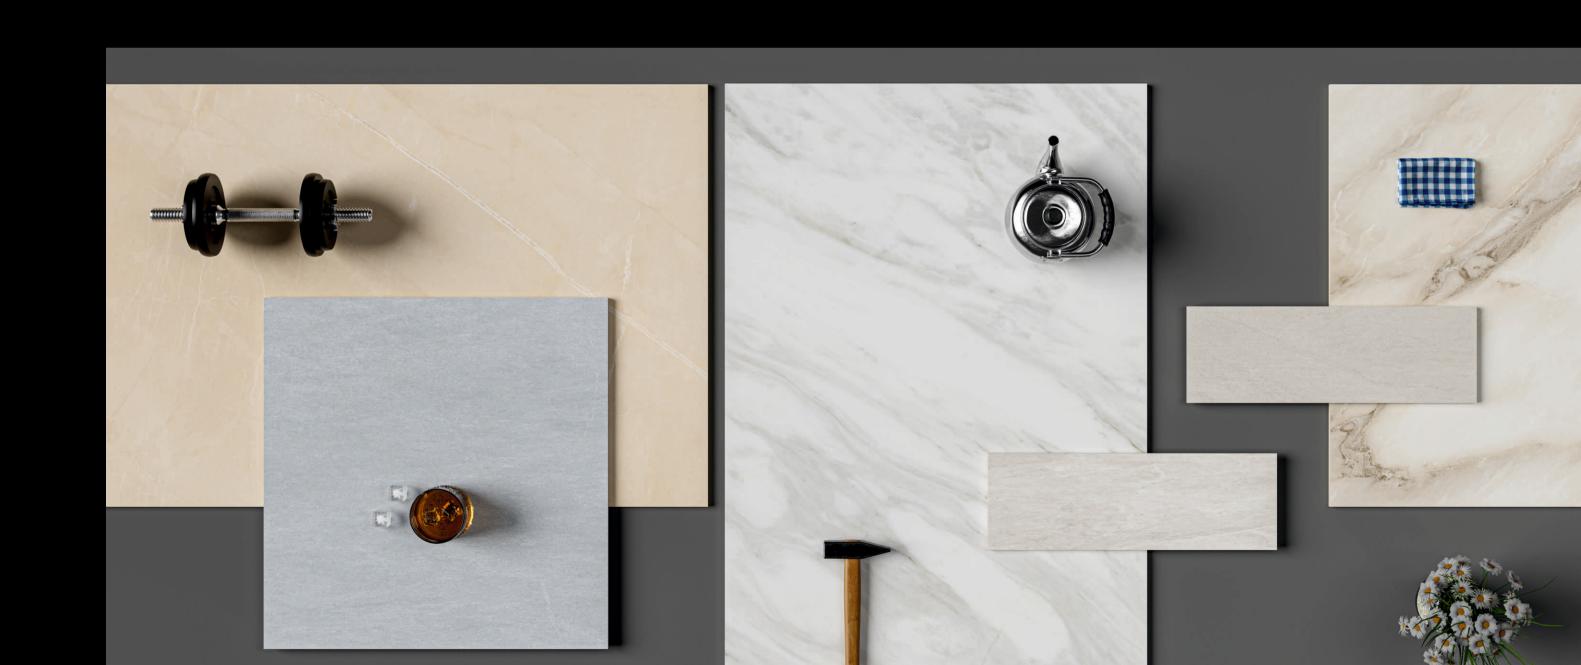





WHY **ACASTA**





Finishes

INDIVIDUAL PLANT FOR BOTH SIZE

At Acasta, our vis ion is to be the leading provider of exceptional porcelain tiles, revolutionizing the industry with innovative designs, and unparalleled quality.

We aspire to transform spaces into breathtaking works of art elevating the aesthetic appeal & functionality of every environment.

www.acastaceramics.com





THE SOFT TOUCH FOR EVERY SPACE

Our VelvoSoft tiles offer a sophisticated finish with a non-reflective surface that adds a touch of elegance to any space. The matte finish is ideal for creating a calming, modern aesthetic. These tiles are versatile and suitable for a wide range of applications, including residential and commercial spaces such as kitchens, bathrooms, and living areas. Their durability and ease of maintenance make them perfect for both flooring and wall installations, providing a sleek, contemporary look that complements various design styles.







ALPINO PEARL ST

SOFT TOUCH Finish

9MM Thickess

600X1200MM










8.5MM Thickess

Random 18















ARMANI CREMA ST

SOFT TOUCH Finish

9MM Thickess

600X1200MM











600X600MM

8.5MM Thickess















ATHENA WHITE ST

SOFT TOUCH Finish

9MM Thickess

600X1200MM











8.5MM Thickess

Random 8

















CARRARA SKY ST

SOFT TOUCH Finish

9MM Thickess

600X1200MM











Random 4

600X600MM

8.5MM Thickess

















CLONE STATUARIO ST

SOFT TOUCH Finish

9MM Thickess

600X1200MM







600X600MM



Random 8












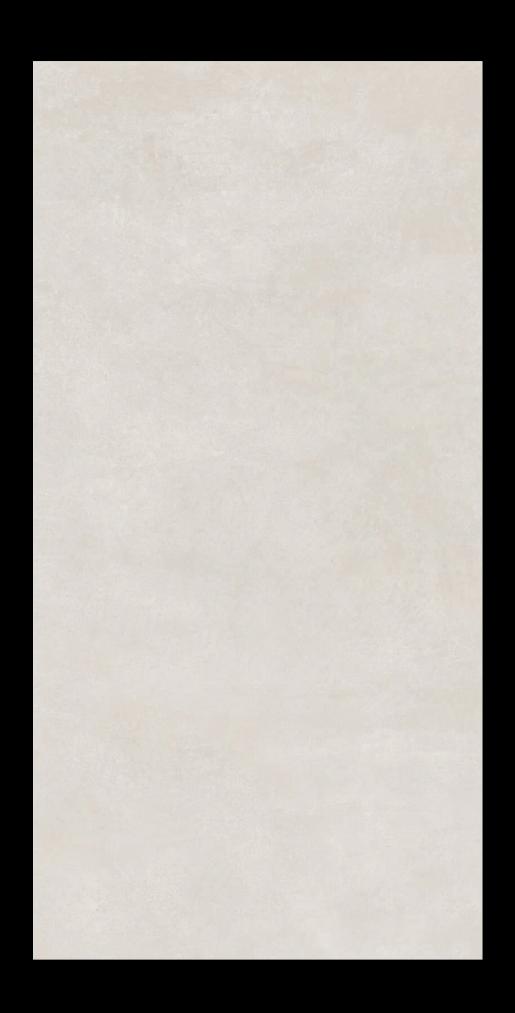



DUSTY BIANCO ST

SOFT TOUCH Finish

9MM Thickess

600X1200MM







Random 8














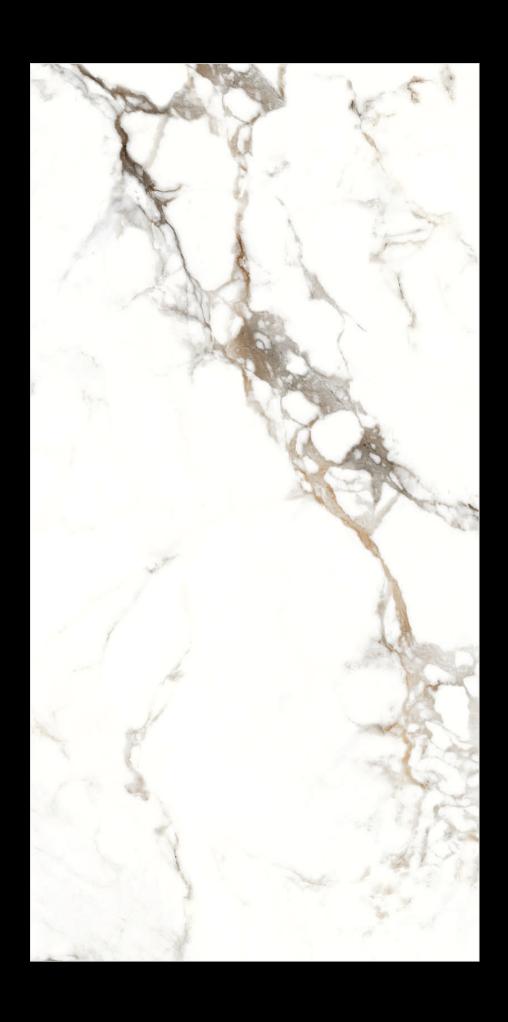





EX-139 BRILLO SATUARIO ST

SOFT TOUCH Finish

9MM Thickess

600X1200MM









Random 4

8.5MM Thickess

Random 8

















EDEN SATUARIO ST

SOFT TOUCH Finish

9MM Thickess

600X1200MM












8.5MM Thickess

Random 12

















INFINITY STATUARIO ST


SOFT TOUCH Finish

9MM Thickess

600X1200MM











8.5MM Thickess

Random 8


















MELDEY WHITE ST


SOFT TOUCH Finish

9MM Thickess

600X1200MM







600X600MM



Random 10

















OIKOS STATUARIO ST

SOFT TOUCH Finish

9MM Thickess

600X1200MM








600X600MM

8.5MM Thickess

Random 10

















ONYX PULS ST

SOFT TOUCH Finish

9MM Thickess

600X1200MM









600X600MM



Random 10

















PEARL STATUARIO ST

SOFT TOUCH Finish

9MM Thickess

600X1200MM











8.5MM Thickess

Random 12












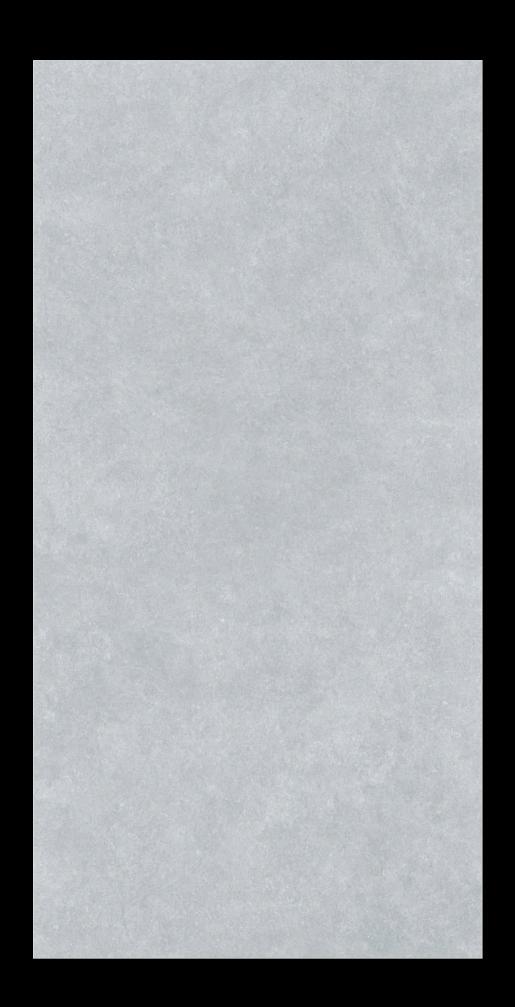





PIEMONTE BIANCO ST

SOFT TOUCH Finish 9MM Thickess

600X1200MM Random 4

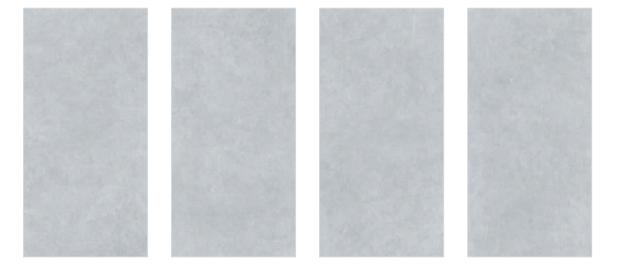

600X600MM 8.5MM Thickess Random 8

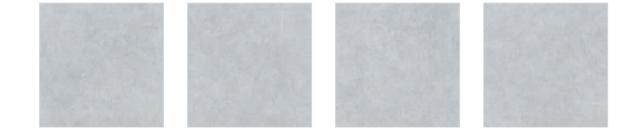











REGAL STATUARIO ST

SOFT TOUCH Finish

9MM Thickess

600X1200MM









Random 4

600X600MM

* 8.5MM Thickess












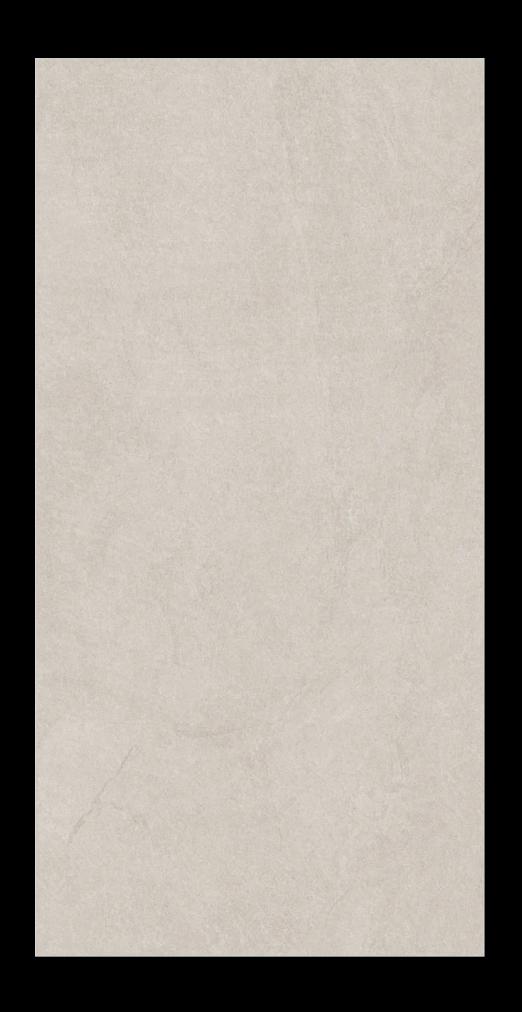



ROCCIA LUPO ST

SOFT TOUCH Finish

9MM Thickess

600X1200MM





600X600MM

8.5MM Thickess

















VARTINO CREMA ST

SOFT TOUCH Finish

9MM Thickess

600X1200MM











8.5MM Thickess

Random 8















VelvoSoft SOFT TOUCH SURFACE

VOLTERRA STATUARIO ST


SOFT TOUCH Finish

9MM Thickess

600X1200MM












600X600MM

8.5MM Thickess











SRNO.	CHARACTERISTICS	ISO TEST METHODS TILES REQUIREMENT AS PER ISO 13006 : 2012 GROUP B LLB		VALUE				
DIMENSION & SURFACE QUALITY								
1	Deviation in length & Width	ISO 10545-2	+/-0.5%	+/-0.2%				
2	Deviation in Thickness	ISO 10545-2	+/-5%	+/-3%				
3	Straightness Of sides	ISO 10545-2	+/-0.5%	+/-0.2%				
4	Rectangularity	ISO 10545-2 +/-0.5%		+/-0.2%				
5	Surface Flatness	ISO 10545-2	+/-0.5%	+/-0.2%				
PHYSICAL & THERMAL PROPERTIES								
1	Water Absorption	ISO 10545-3	<0.50%	< 0.04%				
2	Mohs Hardness	EN-101	Min.5	Min.5				
3	Flexural Strength	ISO 10545-4	>35N/mm2	>40N/mm2				
4	Skid Resistance	ISO 10545-17	>0.4	>0.4				
5	Breaking Strength	ISO 10545-11	>1113N	>1800N				
6	Frost Resistance	ISO 10545-12	Frost Proof	Frost Proof				
7	Thermal Shock Resistance	ISO 10545-9	No Damage	No Damage				
8	Moisture Expansion	ISO 10545-10	Nil	Nil				
9	Resistance to surface Abrasion	ISO 10545-7	Abrasion class shall be specified by the manufacturer	PEI IV				
CHEMICAL PROPERTIES								
1	Chemicals Resistance	ISO 10545-13	No Damage	No Damage				
2	Color Resistance	ISO 10545-16	No Damage	No Damage				
3	Stain Resistance	ISO 10545-14	Resistant	Resistant				

PACKAGING DETAIL

SIZE	PCS./BOX	SQM./BOX	APPROX WEIGHT/BOX	THICKNESS
600X1200MM	2	1.44	29 KG.	9MM
600X600MM	4	1.44	27.5 KG.	8.5MM

